


## PRODUCT DATA SHEET - MODULE 6.0 S

Our standard for most applications

### DESCRIPTION

- Filtration module with ceramic flat sheet membranes suitable for submerged applications
- Multi ceramic plate configuration with exchangeable single ceramic plates
- Internal filtered water piping
- Module housing fully made of glass fiber reinforced resin – free of any steel parts
- Suitable for harsh applications like groundwater, seawater, surface water, MBR, TSE and other challenging industrial waters
- High flux operation up to 1,500 LMH

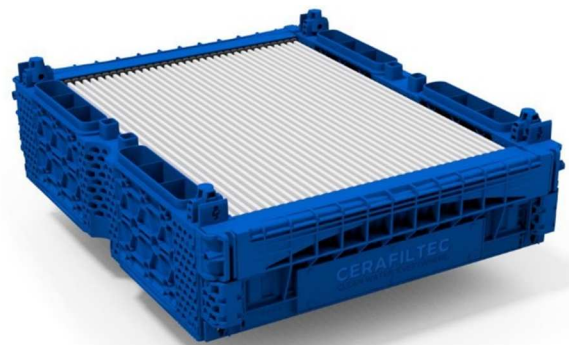

### SPECIFICATIONS

<b>Dimension LxWxH</b>	710x576x160 mm
<b>Dry weight</b>	37.7 kg
<b>Module housing material</b>	NORYL™ resin 30% glass fiber reinforced blend of PPE/PS
<b>No. of single ceramic plates</b>	34
<b>Avg. distance between ceramic plates</b>	6.7 mm
<b>Filter active area</b>	6.0 m <sup>2</sup>
<b>Max flow</b>	9.0 m <sup>3</sup> /hr
<b>Max. negative (suction) pressure</b>	-0.7 bar
<b>Max. positive (backwash) pressure</b>	1.2 bar
<b>Operating temperature</b>	5 - 65 °C
<b>Field of application</b>	Drinking water / sewage / industrial water

